

GO GO[®] ENDURANCE Li




PRIDE[®]
MOBILITY
LIVE YOUR BEST[®]

Tel: +31 (0)85-0408630 . Fax: +31 (0)85-0430039
pridemobility.eu . info@prideeurope.nl

This model offers everything you need for a safe and worry-free trip. Thanks to the standard 8 Ah lithium battery pack, which is permitted on an airplane, the Go Go® Endurance is ideal for long distances.



Enhanced LED lighting

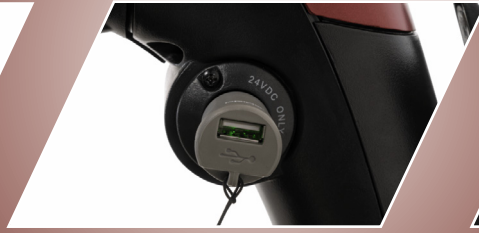

USB charger



Comfort-Trac suspension

Specifications

Weight capacity	147 kg
Speed	Up to 6,7 km/h
Range per charge	Up to 21,3 km
Turning radius	1225 mm
Ground clearance	36 mm
Length	1070 mm
Width	521 - 690 mm
Tires	8" solid, front and rear
Drive	Rear-wheel drive, 24-volt DC motor
Weight without batteries	41 kg
Batteries	Type: Lithium ion Size: 8 Ah or 16 Ah
More?	Download our specifications sheet on the website

Features

- Standard 8 Ah airline-compliant lithium-ion battery pack or upgrade to 16 Ah MAXX battery pack
- Per charge range up to 21,3 km with 16 Ah batteries
- Delta tiller with ergonomic wraparound handles lets you operate the scooter with one hand and rest your wrists
- Convenient dual charging ports can charge battery pack on-board or off-board
- Includes two sets of easily changeable, colored panels

1. Varies with user weight, terrain type, battery amp-hour (AH), battery charge, battery condition, and tire condition. This specification can be subject to a variance of (+ or -) 10%.
2. Due to manufacturing tolerances and continual product improvement, this specification can be subject to a variance of (+ or -) 3%.
3. Battery weight may vary based on battery manufacturer.
4. Includes standard seat weight.

NOTE: All specifications subject to change without notice. The information contained herein is correct at the time of publication; we reserve the right to alter specifications without prior notice. Speed and range vary with user weight, terrain type, battery charge, battery condition and tire pressure. Due to manufacturing tolerances and continual product improvement, length, width, turning radius and ground clearance can be subject to variance of + or - 3%. Dimensions listed are for power base only. Overall measurements will vary based on seating and accessory selections.

Theoretical range is calculated under test conditions in accordance with European standards. Actual range in normal use will depend on many factors, including the condition of the vehicle and its batteries, the weight of the driver, correct tyre pressures, ambient temperature, and the gradient and surface of the road or pavement. Dimensions listed are for power base only. Overall measurements will vary based on seating and accessory selections.

Available colors



Garnet Red